

## About Surveon Technology Inc.

Founded in 1993, Surveon Technology (Public TPE: 2495\*) is the security company of Infortrend Corporation. With continuous investments in research and development for more than 23 years, Surveon's expertise covers all aspects of surveillance systems, including professional camera design, comprehensive video management solutions, and high-availability video storage. All Surveon products are manufactured in the ISO 9001 and ISO 14001 certified self-owned productions sites. And Surveon enterprise end-to-end solutions have been proven to be not only cost-effective but also minimized compatibility risks for business partners from various sectors, including retails, airports, educations, utilities, critical infrastructures, financial institutions and metropolitan markets around the globe.



Surveon Headquarters  
10F-3, No. 102, Sec.3, Jhongshan, Rd.,  
Jhonghe Dist., New Taipei City 235, Taiwan  
Tel:+886-2-2226-2966  
Fax:+886-2-2226-8278  
Inquiry: sales@surveon.com  
Marcom: marketing@surveon.com  
Technical support: support@surveon.com

USA  
Surveon Corporation  
435 Lakeside Dr. Sunnyvale,  
CA 94085, U.S.A.  
Tel:+1-408-988-5728  
Fax:+1-408-435-5048  
E-mail: sales.us@surveon.com  
Technical support: support.us@surveon.com

Japan  
Surveon Technology  
6F Okayasu Bldg., 1-7-14 Shibaura,  
Minato-Ku, Tokyo, 105-0023 Japan  
Tel: +81-03-5730-6551  
Fax: +81-03-5730-6552  
E-mail: sales.jp@surveon.com  
Technical support: support@surveon.com

Europe (EMEA)  
Surveon Europe Limited  
57 Tempus Business Centre, Kingsclere Road,  
Basingstoke RG21 6XG UK  
Tel:+44(0)1256 305 220  
E-mail: sales.europe@surveon.com  
Technical support: support.europe@surveon.com


China  
Surveon Technology Inc.  
Room 1804,Block C, Ocean International Center,  
Dis. Chaoyang, Beijing, China, 100025  
Tel: +86-10-6310-6168  
E-mail: sales.china@surveon.com  
Technical support: support.china@surveon.com



www.surveon.com





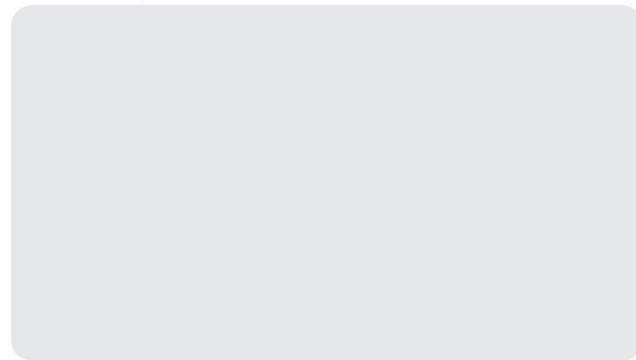








Distributed by:













## 2021 Product Portfolio






















## Network Camera

	Mini Dome		Box				Box			Bullet		
												
Model Name	CAM1420S2	CAM2311SC	CAM2511SC	CAM2331SC	CAM2331SP	CAM2441SC	CAM2441HI	CAM2511	CAM3351R4	CAM3351R6	CAM3351E4-5	
Description	3M Compact IP Fixed Dome	2M D/N Compact IP Camera	5M D/N Compact IP Camera	2M WDR D/N IP Camera	2M P-Iris D/N IP Camera	3M HDR D/N IP Camera	3M Video Analytics D/N IP Camera	5M WDR D/N IP Camera	2M WDR D/N Bullet IP Camera	2M WDR D/N Bullet IP Camera	2M H.265 D/N Bullet IP Camera	
Image Sensor	1/3" Progressive Scan	1/2.9" SONY Exmor	1/2.5" Progressive Scan	1/2.9" SONY Exmor	1/2.9" SONY Exmor	1/3" Progressive Scan	1/3" Progressive Scan	1/2.5" Progressive Scan	1/2.9" SONY Exmor	1/2.9" SONY Exmor	1/2.7" Progressive Scan	
Lens	f2.8 mm, F1.8	Changeable (CS/C Mount)	Changeable (CS/C Mount)	Changeable (CS/C Mount)	f3.0-10.5 mm P-Iris, F1.4 (CS Mount)	Changeable (CS/C Mount)	Changeable (CS/C Mount)	Changeable (CS/C Mount)	f4.2 mm, F1.8	f6.0 mm, F2.0	f4.0 mm, F1.8	
WDR	Yes	Yes	Yes	Yes	Yes	HDR (120dB)	HDR (120dB)	Yes	Yes	Yes	Yes (DWDR)	
IR LED	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	Yes (Max. 20M)	Yes (Max. 20M)	Yes (30M)	
Min Illumination	0.01 Lux @ F1.8 (B/W)	0.01 Lux @ F1.2 (B/W)	0.01 Lux @ F1.2 (B/W)	0.005 Lux @ F1.2 (B/W)	0.005 Lux @ F1.4 (B/W)	0.005 Lux @ F1.2 (B/W)	0.005 Lux @ F1.2 (B/W)	0.005 Lux @ F1.2 (B/W)	0.01 Lux @ F1.8 (B/W)	0.01 Lux @ F2.0 (B/W)	0.01 Lux @ F1.8 (B/W) 0 Lux with IR on	
Iris Control	Fixed	DC-Iris	DC-Iris	DC-Iris	P-iris	DC-Iris	DC-Iris	DC-Iris	Fixed	Fixed	Fixed	
Video Compression	H.264/MPEG-4/MJPEG	H.264/MPEG-4/MJPEG	H.264/MPEG-4/MJPEG	H.264/MPEG-4/MJPEG	H.264/MPEG-4/MJPEG	H.264/MPEG-4/MJPEG	H.264/MPEG-4/MJPEG	H.264/MPEG-4/MJPEG	H.264/MPEG-4/MJPEG	H.264/MPEG-4/MJPEG	H.265/H.264/MJPEG	
Video FPS	25 fps (2048x1536)	30 fps (1920x1080)	12 fps (2560x1920)	30 fps (1920x1080)	30 fps (1920x1080)	30 fps (2048x1536)	30 fps (2048x1536)	14 fps (2560x1920)	30 fps (1920x1080)	30 fps (1920x1080)	30 fps (1920x1080)	
Adv. Video Function	WDR, De-noise	Smart WDR, 2D/3D De-noise, ROI	Smart WDR, 2D/3D De-noise, ROI	Smart WDR, 2D/3D De-noise, ROI	Smart WDR, 2D/3D De-noise, ROI	Smart HDR, 2D/3D De-noise, ROI	Smart HDR, 2D/3D De-noise, ROI	Smart WDR, 2D/3D De-noise, ROI	Smart IR, Smart WDR, 2D/3D De-noise, ROI	Smart IR, Smart WDR, 2D/3D De-noise, ROI	HLC, ROI, 2D/3D De-noise, Defog, Privacy Mask	
Audio	Built-in MIC	2 Way Audio	2 Way Audio	2 Way Audio	2 Way Audio	2 Way Audio	2 Way Audio	2 Way Audio	N/A	N/A	Built-in MIC	
Alarm In/Out	N/A	1/1	1/1	1/1	1/1	1/1	1/1	1/1	N/A	N/A	1/1	
Local Storage	N/A	microSD/SDHC x 1	microSD/SDHC x 1	microSD/SDHC x 1	microSD/SDHC x 1	microSD/SDHC x 1	microSD/SDHC x 1	microSD/SDHC x 1	microSD/SDHC x 1	microSD/SDHC x 1	N/A	
Power	PoE with Class 3	12VDC; PoE with Class 3	12VDC; PoE with Class 3	12VDC; PoE with Class 3	12VDC; PoE with Class 3	12VDC; PoE with Class 3	12VDC; PoE with Class 3	12VDC; PoE with Class 3	PoE with Class 3	PoE with Class 3	12V DC, PoE	
Dimension	ø100mm x 43mm (H)	64mm x 60mm x 97mm	64mm x 60mm x 97mm	74.95mm x 59.3mm x 153.5mm	74.95mm x 59.3mm x 153.5mm	74.95mm x 59.3mm x 153.5mm	74.95mm x 59.3mm x 153.5mm	74.95mm x 59.3mm x 153.5mm	Length: 165mm, Diameter: 75mm	Length: 165mm, Diameter: 75mm	62.4mm x 63mm x 157.3 mm	

	Bullet					Bullet			Dome	
										
Model Name	CAM3361LV	CAM3371EM-5	CAM3451R3	CAM3451R6	CAM3461LV	CAM3471HI	CAM3571VP	CAM3571MP	CAM4311S2	CAM4311E2-5
Description	2M WDR D/N Bullet IP Camera	2M H.265 D/N Bullet IP Camera	3M WDR D/N Bullet IP Camera	3M WDR D/N Bullet IP Camera	3M WDR D/N Bullet IP Camera	3M Video Analytics D/N Bullet IP Camera	5M WDR P-Iris D/N Bullet IP Camera	5M WDR P-Iris D/N Bullet IP Camera	2M 3-Axis D/N IP Fixed Dome	2M H.265 3-Axis D/N IP Fixed Dome
Image Sensor	1/2.9" SONY Exmor	1/2.9" Progressive Scan	1/3" Progressive Scan	1/3" Progressive Scan	1/3" Progressive Scan	1/3" Progressive Scan	1/2.5" Progressive Scan	1/2.5" Progressive Scan	1/2.9" SONY Exmor	1/2.7" Progressive Scan
Lens	f3-10.5 mm, F1.4	f2.8-12 mm Autofocus, F1.4	f3.6 mm, F1.8	f6.0 mm, F2.0	f2.8-12 mm, F1.4	f3-10.5 mm Autofocus, F1.4	f3.0-10.5 mm P-Iris, F1.4 (CS Mount)	f4.5-9 mm Autofocus, F1.2	f2.8 mm, F1.8	f2.8 mm, F2.0
WDR	Yes	Yes (120dB)	Yes	Yes	Yes	HDR (120dB)	Yes	Yes	Yes	Yes (120dB)
IR LED	Yes (Max. 20M)	Yes (50M)	Yes (Max. 20M)	Yes (Max. 20M)	Yes (Max. 20M)	Yes (Max. 30M)	Yes (Max. 30M)	Yes (Max. 30M)	Yes (Max. 10M)	Yes (30M)
Min Illumination	0.01 Lux @ F1.4 (B/W)	"0.01 Lux @ F1.4 0 Lux with IR on"	0.01 Lux @ F1.8 (B/W)	0.01 Lux @ F2.0 (B/W)	0.01 Lux @ F1.4 (B/W)	0.01 Lux @ F1.4 (B/W)	0.01 Lux @ F1.4 (B/W)	0.01 Lux @ F1.2 (B/W)	0.01 Lux @ F1.8 (B/W)	"0.01 Lux @ F2.0 0 Lux with IR on"
Iris Control	Auto Electronic	Auto Electronic	Fixed	Fixed	Auto Electronic	P-iris	P-Iris	P-iris	Fixed	Fixed
Video Compression	H.264/MPEG-4/MJPEG	H.265/H.264/MJPEG	H.264/MPEG-4/MJPEG	H.264/MPEG-4/MJPEG	H.264/MPEG-4/MJPEG	H.264/MPEG-4/MJPEG	H.264/MPEG-4/MJPEG	H.264/MPEG-4/MJPEG	H.264/MPEG-4/MJPEG	H.265/H.264/MJPEG
Video FPS	30 fps (1920x1080)	30 fps (1920x1080)	25 fps (2048x1536)	25 fps (2048x1536)	25 fps (2048x1536)	30 fps (2048x1536)	14 fps (2560x1920)	14 fps (2560x1920)	30 fps (1920x1080)	30 fps (1920x1080)
Adv. Video Function	Smart IR, Smart WDR, 2D/3D De-noise, ROI	HLC, ROI, 2D/3D De-noise, Defog, Privacy Mask	Smart IR, Smart WDR, 2D/3D De-noise, ROI	Smart IR, Smart WDR, 2D/3D De-noise, ROI	Smart IR, Smart WDR, 2D/3D De-noise, ROI	Smart IR, Smart HDR, 2D/3D De-noise, ROI	Smart IR, Smart WDR, 2D/3D De-noise, ROI	Smart IR, Smart WDR, 2D/3D De-noise, ROI	Smart IR, Smart WDR, 2D/3D De-noise, ROI	HLC, ROI, 2D/3D De-noise, Defog, Privacy Mask
Audio	N/A	2 Way Audio	N/A	N/A	N/A	2 Way Audio	2 Way Audio	2 Way Audio	Built-in MIC (2 way optional)	2 Way Audio
Alarm In/Out	N/A	1/1	N/A	N/A	N/A	1/1	1/1	1/1	1/1 (optional)	1/1
Local Storage	microSD/SDHC x 1	microSD x 1	microSD/SDHC x 1	microSD/SDHC x 1	microSD/SDHC x 1	microSD/SDHC x 1	microSD/SDHC x 1	microSD/SDHC x 1	microSD/SDHC x 1	microSD x 1
Power	PoE with Class 3	12V DC, PoE	PoE with Class 3	PoE with Class 3	PoE with Class 3	12VDC; PoE with Class 3	12VDC; PoE with Class 3	12VDC; PoE with Class 3	PoE with Class 3	12V DC, PoE
Dimension	Length: 165mm, Diameter: 75mm	86mm x 71.7mm x 253.4 mm	Length: 165mm, Diameter: 75mm	Length: 165mm, Diameter: 75mm	Length: 165mm, Diameter: 75mm	105mm x 218.8mm x 191.41mm	105mm x 218.8mm x 191.41mm	105mm x 218.8mm x 191.41mm	ø110mm x 100mm (H)	Ø108.5mm x 81mm

## Network Camera

	Dome				Dome				
									
<b>Model Name</b>	<b>CAM4321LV</b>	<b>CAM4351R2</b>	<b>CAM4361LV</b>	<b>CAM4371HEM</b>	<b>CAM4371EM-5</b>	<b>CAM4410S2</b>	<b>CAM4411S2/S3/S4/S6</b>	<b>CAM4421LV</b>	<b>CAM4461LV</b>
<b>Description</b>	2M 3-Axis D/N IP Fixed Dome	2M 3-Axis D/N Outdoor IP Fixed Dome	2M 3-Axis D/N Outdoor IP Fixed Dome	2M WDR P-Iris D/N Outdoor IP Fixed Dome	2M H.265 3-Axis D/N IP Fixed Dome	3M 3-Axis D/N IP Fixed Dome	3M 3-Axis D/N IP Fixed Dome	3M 3-Axis D/N IP Fixed Dome	3M 3-Axis D/N Outdoor IP Fixed Dome
<b>Image Sensor</b>	1/2.9" SONY Exmor	1/2.9" SONY Exmor	1/2.9" SONY Exmor	1/2.9" SONY Exmor	1/2.9" Progressive Scan	1/3" Progressive Scan	1/3" Progressive Scan	1/3" Progressive Scan	1/2.5" Progressive Scan
<b>Lens</b>	f2.8-12 mm, F1.4	f2.8 mm, F1.8	f2.8-12 mm, F1.4	f3-10.5 mm Autofocus, F1.4	f2.8-12 mm Autofocus, F1.4	f2.8 mm, F1.8	f2.8 mm, F1.8/f3.6 mm, F1.8 f4.2 mm, F1.8/f6.0 mm, F2.0	f2.8-12 mm, F1.4	f3-10.5 mm, F1.4
<b>WDR</b>	Yes	Yes	Yes	True WDR (120dB)	Yes (120dB)	Yes	Yes	Yes	Yes
<b>IR LED</b>	Yes (Max. 10M)	Yes (Max. 10M)	Yes (Max. 10M)	Yes (Max. 30M)	Yes (30M)	N/A	Yes (Max. 10M)	Yes (Max. 10M)	Yes (Max. 10M)
<b>Min Illumination</b>	0.01 Lux @ F1.4 (B/W)	0.01 Lux @ F1.8 (B/W)	0.01 Lux @ F1.4 (B/W)	0.005 Lux @ F1.4 (B/W)	"0.01 Lux @ F1.4 0 Lux with IR on"	0.01 Lux @ F1.8 (B/W)	0.01 Lux @ F1.8 (B/W)	0.01 Lux @ F1.4 (B/W)	0.01 Lux @ F1.4 (B/W)
<b>Iris Control</b>	Auto Electronic	Fixed	Auto Electronic	P-iris	Auto Electronic	Fixed	Fixed	Auto Electronic	Auto Electronic
<b>Video Compression</b>	H.264/MPEG-4/MJPEG	H.264/MPEG-4/MJPEG	H.264/MPEG-4/MJPEG	H.264/MPEG-4/MJPEG	H.265/H.264/MJPEG	H.264/MPEG-4/MJPEG	H.264/MPEG-4/MJPEG	H.264/MPEG-4/MJPEG	H.264/MPEG-4/MJPEG
<b>Video FPS</b>	30 fps (1920x1080)	30 fps (1920x1080)	30 fps (1920x1080)	60 fps (1920x1080)	30 fps (1920x1080)	25 fps (2048x1536)	25 fps (2048x1536)	25 fps (2048x1536)	20 fps (2048x1536)
<b>Adv. Video Function</b>	Smart IR, Smart WDR, 2D/3D De-noise, ROI	Smart IR, Smart WDR, 2D/3D De-noise, ROI	Smart IR, Smart WDR, 2D/3D De-noise, ROI	Smart IR, Smart WDR, 2D/3D De-noise, ROI	HLC, ROI, 2D/3D De-noise, Defog, Privacy Mask	Smart IR, Smart WDR, 2D/3D De-noise, ROI	Smart IR, Smart WDR, 2D/3D De-noise, ROI	Smart IR, Smart WDR, 2D/3D De-noise, ROI	Smart IR, Smart WDR, 2D/3D De-noise, ROI
<b>Audio</b>	Built-in MIC (2 way optional)	N/A	N/A	2 Way Audio	2 Way Audio	Built-in MIC (2 way optional)	Built-in MIC (2 way optional)	Built-in MIC (2 way optional)	N/A
<b>Alarm In/Out</b>	1/1 (optional)	N/A	N/A	1/1	1/1	1/1 (optional)	1/1 (optional)	1/1 (optional)	N/A
<b>Local Storage</b>	microSD/SDHC x 1	microSD/SDHC x 1	microSD/SDHC x 1	microSD/SDHC x 1	microSD x 1	microSD/SDHC x 1	microSD/SDHC x 1	microSD/SDHC x 1	microSD/SDHC x 1
<b>Power</b>	PoE with Class 3	PoE with Class 3	PoE with Class 3	12VDC; PoE with Class 3	12V DC, PoE	PoE with Class 3	PoE with Class 3	PoE with Class 3	PoE with Class 3
<b>Dimension</b>	ø110mm x 100mm (H)	ø130mm x 103mm (H)	ø130mm x 103mm (H)	ø144mm x 116mm (H)	Ø148mm x 111.3mm	ø110mm x 100mm (H)	ø110mm x 100mm (H)	ø110mm x 100mm (H)	ø130mm x 103mm (H)

	Dome				PT Dome	PTZ Dome	Speed Dome		Fisheye			
												
<b>Model Name</b>	<b>CAM4471HI</b>	<b>CAM4521LV</b>	<b>CAM4561LV</b>	<b>CAM4571VP</b>	<b>CAM4571MP</b>	<b>CAM5321S4</b>	<b>CAM5330SZ</b>	<b>CAM6471EZ-5</b>	<b>CAM6471LZ-5</b>	<b>CAM7510</b>	<b>CAM7511</b>	<b>CAM4571RF</b>
<b>Description</b>	3M Video Analytics D/N Outdoor IP Fixed Dome	5M 3-Axis D/N IP Fixed Dome	5M 3-Axis D/N Outdoor IP Fixed Dome	5M WDR P-Iris D/N Outdoor IP Fixed Dome	5M WDR P-Iris D/N Outdoor IP Fixed Dome	2M Compact D/N IP PT Dome	2M 10x Zoom IP PTZ Dome	3M 30x Zoom D/N Outdoor IP Speed Dome	3M 30x Zoom D/N Outdoor IR Speed Dome	5M WDR Fisheye IP Camera	5M WDR D/N Fisheye IP Camera	5M WDR D/N Outdoor Fisheye IP Camera
<b>Image Sensor</b>	1/3" Progressive Scan	1/2.5" Progressive Scan	1/2.5" Progressive Scan	1/2.5" Progressive Scan	1/2.5" Progressive Scan	1/2.7" Progressive Scan	1/2.7" Progressive Scan	1/2.8" SONY Exmor	1/2.8" SONY Exmor	1/2.5" Progressive Scan	1/2.5" Progressive Scan	1/2.5" Progressive Scan
<b>Lens</b>	f3-10.5 mm Autofocus, F1.4	f3-10.5 mm, F1.4	f3-10.5 mm, F1.4	f3.3-10.5 mm P-Iris, F1.4	f4.5-9 mm Autofocus, F1.2	f4.0 mm, F2.0	f4.9-49mm Autofocus, F1.8-3.0	f4.3-129 mm Autofocus, F1.6	f4.3-129 mm Autofocus, F1.6	f1.27mm, F2.0	f1.05 mm, F2.8	f1.37mm, F2.0
<b>WDR</b>	HDR (120dB)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
<b>IR LED</b>	Yes (Max. 30M)	Yes (Max. 30M)	Yes (Max. 30M)	Yes (Max. 30M)	Yes (Max. 30M)	Yes (Max. 10M)	N/A	N/A	N/A	N/A	N/A	N/A
<b>Min Illumination</b>	0.01 Lux @ F1.4 (B/W)	0.01 Lux @ F1.4 (B/W)	0.01 Lux @ F1.4 (B/W)	0.01 Lux @ F1.4 (B/W)	0.01 Lux @ F1.2 (B/W)	0.1 Lux @ F2.0 (B/W)	0.1 Lux @ F2.0 (B/W)	0.002 Lux @ F1.6 (B/W)	0.002 Lux @ F1.6 (B/W)	0.05 Lux @ F2.0 (B/W)	0.05 Lux @ F2.8 (B/W)	0.05 Lux @ F2.0 (B/W)
<b>Iris Control</b>	P-iris	Auto Electronic	Auto Electronic	P-iris	P-iris	Fixed	DC-Iris	Auto Electronic	Auto Electronic	Fixed	Fixed	Fixed
<b>Video Compression</b>	H.264/MPEG-4/MJPEG	H.264/MPEG-4/MJPEG	H.264/MPEG-4/MJPEG	H.264/MPEG-4/MJPEG	H.264/MPEG-4/MJPEG	H.264/MPEG-4/MJPEG	H.264/MPEG-4/MJPEG	H.265/H.264/MJPEG	H.265/H.264/MJPEG	H.264/MPEG-4/MJPEG	H.264/MPEG-4/MJPEG	H.264/MPEG-4/MJPEG
<b>Video FPS</b>	30 fps (2048x1536)	12 fps (2560x1920)	12 fps (2560x1920)	14 fps (2560x1920)	14 fps (2560x1920)	30 fps (1920x1080)	30 fps (1920x1080)	30 fps (2048 x 1536)	30 fps (2048 x 1536)	14 fps (2560x1920)	14 fps (2560x1920)	12 fps (2560x1920)
<b>Adv. Video Function</b>	Smart IR, Smart HDR, 2D/3D De-noise, ROI	Smart IR, Smart WDR, 2D/3D De-noise, ROI	Smart IR, Smart WDR, 2D/3D De-noise, ROI	Smart IR, Smart WDR, 2D/3D De-noise, ROI	Smart IR, Smart WDR, 2D/3D De-noise, ROI	WDR, 3D De-noise, ROI	WDR, 3D De-noise, ROI, Auto Tracking	WDR, De-noise, Auto Tracking	WDR, De-noise, Auto Tracking	Smart WDR, 2D/3D De-noise, ROI	Smart WDR, 2D/3D De-noise, ROI	Smart WDR, 2D/3D De-noise, ROI
<b>Audio</b>	2 Way Audio	Built-in MIC (2 way optional)	N/A	2 Way Audio	2 Way Audio	Built-in MIC	1 Way Audio	2 Way Audio	2 Way Audio	Built-in MIC (2 way optional)	Built-in MIC (2 way optional)	N/A
<b>Alarm In/Out</b>	1/1	N/A	N/A	1/1	1/1	N/A	1/1	4/2	4/2	1/1 (optional)	1/1 (optional)	N/A
<b>Local Storage</b>	microSD/SDHC x 1	microSD/SDHC x 1	microSD/SDHC x 1	microSD/SDHC x 1	microSD/SDHC x 1	microSD/SDHC x 1	SD Card x 1	MicroSD/SDXC/SDHC x 1	MicroSD/SDXC/SDHC x 1	microSD/SDHC x 1	microSD/SDHC x 1	microSD/SDHC x 1
<b>Power</b>	12VDC; PoE with Class 3	PoE with Class 3	PoE with Class 3	12VDC; PoE with Class 3	12VDC; PoE with Class 3	12VDC; PoE with Class 3	12VDC; PoE with Class 3	24VAC, 12VDC, PoE	24VAC, 12VDC, PoE	12VDC; PoE with Class 3	12VDC; PoE with Class 3	PoE with Class 3
<b>Dimension</b>	ø144mm x 116mm (H)	ø130mm x 103mm (H)	ø130mm x 103mm (H)	ø144mm x 116mm (H)	ø144mm x 116mm (H)	Height : 63mm, Diameter : 92mm	Height : 128mm, Diameter : 130mm	ø192mm x 282mm (H)	Ø 207.4 x 300.4 mm with Sunshield	Ø160mm x 47mm (H)	Ø160mm x 47mm (H)	ø130mm x 103mm (H)

# Network Video Recorder

## Professional

## Professional



Model Name	SMR2110P-4	SMR2110P-9	SMR2110P-16	SMR2110P-24	SMR2110P-32	SMR5110P-16	SMR5110P-24	SMR5110P-32	NVR3104P1-4	NVR3104P1-9
Description	4CH Megapixel Compact RAID NV	9CH Megapixel Compact RAID NV	16CH Megapixel Compact RAID NVR	24CH Megapixel Compact RAID NVR	32CH Megapixel Compact RAID NVR	16CH Megapixel Compact RAID NVR	24CH Megapixel Compact RAID NVR	32CH Megapixel Compact RAID NVR	4CH Megapixel Linux RAID NVR	9CH Megapixel Linux RAID NVR
Recording Camera Channel	4	9	16	24	32	16	24	32	4	9
Recording Days over CH*	90 Days	40 Days	22 Days	15 Days	11 Days	45 Days	30 Days	22 Days	137 Days	61 Days
RAID Level			RAID 1				RAID 1, 5, 6		RAID 1, 5, 6	
Local Live View			1x DVI-I				1x DVI-I		1x VGA, 1x HDMI, 1x DVI-D	
Recording Throughput			192Mbps				192Mbps		96Mbps	
Video Management Solution	Surveon Enterprise Video Management Software (Client/Server Architecture, Multi Live View, On Screen PTZ Control , HTML Overlay, Playback, Smart Event Search, Real-time Video Analytics, Real-time Alarm Event Handling, Multiple LAN...)					Surveon Enterprise Video Management Software (Client/Server Architecture, Multi Live View, On Screen PTZ Control , HTML Overlay, Playback, Smart Event Search, Real-time Video Analytics, Real-time Alarm Event Handling, Multiple LAN...)				
Storage Expansion			iSCSI/NAS				iSCSI/NAS		iSCSI/NAS	
Server Processor			Intel® Celeron Quad Core 2.0GHz				Intel® Celeron Quad Core 2.0GHz		Intel® Celeron Dual Core 1.8GHz	
No. HDD			2x SATA				5x SATA		4x SATA	
Video Analytics Channel			4				4		4	
Remote View Soltuion	Remote Client (Full Managemnet), Web Client (Live View, PTZ Control, Playback, Real-time Event), iPhone Client (Live View, PTZ Control, Playback, Real-time Event), Android Client (Live View, PTZ Control, Playback, Real-time Event)					Remote Client (Full Managemnet), Web Client (Live View, PTZ Control, Playback, Real-time Event), iPhone Client (Live View, PTZ Control, Playback, Real-time Event), Android Client (Live View, PTZ Control, Playback, Real-time Event)				
CMS Soltuion	Centralized Domain Management (SCC), Video Matrix Wall, SurveOne (Web-based Easy System Management Tool)					Centralized Domain Management (SCC), Video Matrix Wall, SurveOne (Web-based Easy System Management Tool)				
Dimension			190(H) x 110(W) x 245(D) mm				225(H) x 175(W) x 245(D) mm		88(H) x 430(W) x 390(D) mm	
Weight			3Kg (w/o Hard Disk)				5Kg (w/o Hard Disk)		≤ 9kg (w/o Hard Disk)	
Warranty			3 years				3 years		2 years	
Certification			CE, FCC				CE, FCC		CE, FCC, CB, UL	

## Professional

## Enterprise



Model Name	NVR3104P1-16	NVR3304E1-16	NVR3304E1-24	NVR3304E1-32	SMR8300E-16	SMR8300E-24	SMR8300E-32	SMR8300A-16	SMR8300A-24	SMR8300A-32
Description	16CH Megapixel Linux RAID NVR	4CH Megapixel Linux RAID NVR	9CH Megapixel Linux RAID NVR	16CH Megapixel Linux RAID NVR	16CH Megapixel Hot-swappable RAID NVR	24CH Megapixel Hot-swappable RAID NVR	32CH Megapixel Hot-swappable RAID NVR	16CH Megapixel Hot-swappable RAID NVR	24CH Megapixel Hot-swappable RAID NVR	32CH Megapixel Hot-swappable RAID NVR
Recording Camera Channel	16	16	24	32	16	24	32	16	24	32
Recording Days over CH*	34 Days	34 Days	23 Days	17 Days	80 Days	53 Days	40 Days	80 Days	53 Days	40 Days
RAID Level	RAID 1, 5, 6		RAID 1, 5, 6			RAID 1, 5, 6		RAID 1, 5, 6		RAID 1, 5, 6
Local Live View	1x VGA, 1x HDMI, 1x DVI-D		1x VGA, 1x HDMI			1x VGA, 1x HDMI		1x VGA, 1x HDMI		1x VGA, 1x HDMI
Recording Throughput	96Mbps		192Mbps			192Mbps		384Mbps		
Video Management Solution	Surveon Enterprise Video Management Software (Client/Server Architecture, Multi Live View, On Screen PTZ Control , HTML Overlay, Playback, Smart Event Search, Real-time Video Analytics, Real-time Alarm Event Handling, Multiple LAN...)				Surveon Enterprise Video Management Software (Client/Server Architecture, Multi Live View, On Screen PTZ Control , HTML Overlay, Playback, Smart Event Search, Real-time Video Analytics, Real-time Alarm Event Handling, Multiple LAN...)					
Storage Expansion	iSCSI/NAS		iSCSI/NAS			iSCSI/NAS		iSCSI/NAS		iSCSI/NAS
Server Processor	Intel® Celeron Dual Core 1.8GHz		Intel® Core i3 Dual Core 3.3GHz			Intel® Core i3 Dual Core 3.3GHz		Intel® Core i7 Quad Core 3.4GHz		
No. HDD	4x SATA		4x SATA			8x SATA		8x SATA		
Video Analytics Channel	4		4			8		16		
Remote View Soltuion	Remote Client (Full Managemnet), Web Client (Live View, PTZ Control, Playback, Real-time Event), iPhone Client (Live View, PTZ Control, Playback, Real-time Event), Android Client (Live View, PTZ Control, Playback, Real-time Event)				Remote Client (Full Managemnet), Web Client (Live View, PTZ Control, Playback, Real-time Event), iPhone Client (Live View, PTZ Control, Playback, Real-time Event), Android Client (Live View, PTZ Control, Playback, Real-time Event)					
CMS Soltuion	Centralized Domain Management (SCC), Video Matrix Wall, SurveOne (Web-based Easy System Management Tool)				Centralized Domain Management (SCC), Video Matrix Wall, SurveOne (Web-based Easy System Management Tool)					
Dimension	88(H) x 430(W) x 390(D) mm		88(H) x 430(W) x 390(D) mm			310(H) x 175(W) x 380(D) mm		310(H) x 175(W) x 380(D) mm		
Weight	≤ 9kg (w/o Hard Disk)		≤ 9kg (w/o Hard Disk)			≤ 9kg (w/o Hard Disk)		≤ 9kg (w/o Hard Disk)		
Warranty	2 years		2 years			3 years		3 years		
Certification	CE, FCC, CB, UL		UL, CB, FCC/CE Class A			CE, FCC, CB, UL		CE, FCC, CB, UL		

\* Based on 4TB HDD, 2Mbps bit rate, 24 hr recording, RAID 5 best data protection (Non-RAID for 2 Bay)

# Network Video Recorder

## Enterprise

## Enterprise



Model Name	SMR8300A-48	SMR8300A-64	NVR5408E1-16	NVR5408E1-24	NVR5408E1-32	NVR5412-16	NVR5412-24	NVR5412-32	NVR5412-48	NVR5412-64	NVR5412-96
Description	48CH Megapixel Hot-swappable RAID NVR	64CH Megapixel Hot-swappable RAID NVR	16CH Megapixel Rackmount RAID NVR	24CH Megapixel Rackmount RAID NVR	32CH Megapixel Rackmount RAID NVR	16CH Megapixel Rackmount RAID NVR	24CH Megapixel Rackmount RAID NVR	32CH Megapixel Rackmount RAID NVR	48CH Megapixel Rackmount RAID NVR	64CH Megapixel Rackmount RAID NVR	96CH Megapixel Rackmount RAID NVR
Recording Camera Channel	48	64	16	24	32	16	24	32	48	64	96
Recording Days over CH*	26 Days	20 Days	80 Days	53 Days	40 Days	128 Days	85 Days	64 Days	42 Days	32 Days	21 Days
RAID Level	RAID 1, 5, 6		RAID 1, 5, 6, 1+Spare, 5+Spare, 6+Spare			RAID 1, 5, 6, 1+Spare, 5+Spare, 6+Spare					
Local Live View	1x VGA, 1x HDMI		1x VGA, 2x HDMI			1x VGA, 2x HDMI					
Recording Throughput	384Mbps		384Mbps			576Mbps					
Video Management Solution	Surveon Enterprise Video Management Software (Client/Server Architecture, Multi Live View, On Screen PTZ Control , HTML Overlay, Playback, Smart Event Search, Real-time Video Analytics, Real-time Alarm Event Handling, Multiple LAN...)					Surveon Enterprise Video Management Software (Client/Server Architecture, Multi Live View, On Screen PTZ Control , HTML Overlay, Playback, Smart Event Search, Real-time Video Analytics, Real-time Alarm Event Handling, Multiple LAN...)					
Storage Expansion	iSCSI/NAS		iSCSI/NAS/JBOD			iSCSI/NAS/JBOD					
Server Processor	Intel® Core i7 Quad Core 3.4GHz		Intel® Core i3 Dual Core 3.5GHz			Intel® Core i3 Dual Core 3.5GHz or Intel® Xeon E3 Quad Core 3.2GHz					
No. HDD	8x SATA		8x SATA			12 x SATA					
Video Analytics Channel	16		16			32					
Remote View Soltuion	Remote Client (Full Managemnet), Web Client (Live View, PTZ Control, Playback, Real-time Event), iPhone Client (Live View, PTZ Control, Playback, Real-time Event), Android Client (Live View, PTZ Control, Playback, Real-time Event)					Remote Client (Full Managemnet), Web Client (Live View, PTZ Control, Playback, Real-time Event), iPhone Client (Live View, PTZ Control, Playback, Real-time Event), Android Client (Live View, PTZ Control, Playback, Real-time Event)					
CMS Soltuion	Centralized Domain Management (SCC), Video Matrix Wall, SurveOne (Web-based Easy System Management Tool)					Centralized Domain Management (SCC), Video Matrix Wall, SurveOne (Web-based Easy System Management Tool)					
Dimension	310(H) x 175(W) x 380(D) mm		88(H) x 447.4(W) x 524.41(D) mm			(H)88.00mm x (W)447.40mm x (L)524.41mm					
Weight	≤ 9kg (w/o Hard Disk)		13.60kg/ 29.98lbs (without HDDs)			13.60kg/ 29.98lbs (without HDDs)					
Warranty	3 years		3 years			3 years					
Certification	CE, FCC, CB, UL		FCC/CE Class A			FCC/CE Class A					

## Enterprise

## Corporate



Model Name	NVR5416-16	NVR5416-24	NVR5416-32	NVR5416-48	NVR5416-64	NVR5416-96	NVR2116	NVR2124	NVR2132	NVR2148	NVR2164	
Description	16CH Megapixel Rackmount RAID NVR	24CH Megapixel Rackmount RAID NVR	32CH Megapixel Rackmount RAID NVR	48CH Megapixel Rackmount RAID NVR	64CH Megapixel Rackmount RAID NVR	96CH Megapixel Rackmount RAID NVR	16CH Megapixel Rackmount RAID NVR	24CH Megapixel Rackmount RAID NVR	32CH Megapixel Rackmount RAID NVR	48CH Megapixel Rackmount RAID NVR	64CH Megapixel Rackmount RAID NVR	
Recording Camera Channel	16	24	32	48	64	96	16	24	32	48	64	
Recording Days over CH*	171 Days	114 Days	85 Days	57 Days	42 Days	28 Days	365+ Days	365+ Days	365+ Days	365+ Days	365+ Days	
RAID Level	RAID 1, 5, 6, 1+Spare, 5+Spare, 6+Spare						RAID 0, 1(0+1), 3, 5, 6, 10, 30, 50, 60					
Local Live View	1x VGA, 2x HDMI						1x VGA					
Recording Throughput	576Mbps						1000+ Mbps (Depend on Storage)					
Video Management Solution	Surveon Enterprise Video Management Software (Client/Server Architecture, Multi Live View, On Screen PTZ Control , HTML Overlay, Playback, Smart Event Search, Real-time Video Analytics, Real-time Alarm Event Handling, Multiple LAN...)						Surveon Enterprise Video Management Software (Client/Server Architecture, Multi Live View, On Screen PTZ Control , HTML Overlay, Playback, Smart Event Search, Real-time Video Analytics, Real-time Alarm Event Handling, Multiple LAN...)					
Storage Expansion	iSCSI/NAS/JBOD						iSCSI/SAS					
Server Processor	16 x SATA						Intel Core i3 3.3GHz or Intel Xeon E3 3.2GHz					
No. HDD	32						Up to 240 SATA					
Video Analytics Channel	32						32					
Remote View Soltuion	Remote Client (Full Managemnet), Web Client (Live View, PTZ Control, Playback, Real-time Event), iPhone Client (Live View, PTZ Control, Playback, Real-time Event), Android Client (Live View, PTZ Control, Playback, Real-time Event)						Remote Client (Full Managemnet), Web Client (Live View, PTZ Control, Playback, Real-time Event), iPhone Client (Live View, PTZ Control, Playback, Real-time Event), Android Client (Live View, PTZ Control, Playback, Real-time Event)					
CMS Soltuion	Centralized Domain Management (SCC), Video Matrix Wall, SurveOne (Web-based Easy System Management Tool)						Centralized Domain Management (SCC), Video Matrix Wall, SurveOne (Web-based Easy System Management Tool)					
Dimension	(H)130.00mm x (W)447.40mm x (L)524.20mm						43(H) x 437(W) x 503(D) mm					
Weight	21.54kg/ 47.49lbs (without HDDs)						16.5kg (w/o Hard Disk)					
Warranty	3 years						3 years					
Certification	FCC/CE Class A						CE, FCC, CB, UL					

\* Based on 4TB HDD, 2Mbps bit rate, 24 hr recording, RAID 5 best data protection (Non-RAID for 2 Bay)

# Network Video Recorder

Corporate							Corporate					Cloud NVR Series						
<b>Model Name</b>	<b>NVR7312-32</b>	<b>NVR7312-48</b>	<b>NVR7312-64</b>	<b>NVR7312-96</b>	<b>NVR7312-128</b>	<b>NVR7316-32</b>	<b>NVR7316-48</b>	<b>NVR7316-64</b>	<b>NVR7316-96</b>	<b>NVR7316-128</b>	<b>NVR7812</b>	<b>NVR7816</b>	<b>EonStor GSe Pro 105</b>	<b>EonStor GSe Pro 108</b>				
Description	32CH Megapixel Rackmount H/W RAID NVR	48CH Megapixel Rackmount H/W RAID NVR	64CH Megapixel Rackmount H/W RAID NVR	96CH Megapixel Rackmount H/W RAID NVR	128CH Megapixel Rackmount H/W RAID NVR	32CH Megapixel Rackmount H/W RAID NVR	48CH Megapixel Rackmount H/W RAID NVR	64CH Megapixel Rackmount H/W RAID NVR	96CH Megapixel Rackmount H/W RAID NVR	128CH Megapixel Rackmount H/W RAID NVR	Megapixel Rackmount H/W RAID NVR with Pre-loaded Milestone VMS	Megapixel Rackmount H/W RAID NVR with Pre-loaded Milestone VMS	Cloud-integrated Unified Storage with Surveon NVR License	Cloud-integrated Unified Storage with Surveon NVR License				
Recording Camera Channel	32	48	64	96	128	32	48	64	96	128	Based on VMS		4/9/16	4/9/16				
Recording Days over CH*	85 Days	57 Days	42 Days	28 Days	21 Days	85 Days	57 Days	42 Days	28 Days	21 Days	N/A		Minimum 34 Days	Minimum 34 Days				
RAID Level	RAID 1, 5, 6, 1+Spare, 5+Spare, 6+Spare							RAID 1, 5, 6, 1+Spare, 5+Spare, 6+Spare					RAID 0, 1 (0+1), 3, 5, 6, 10, 30, 50, 60					
Local Live View	1x VGA, 2x HDMI							1x VGA, 2x HDMI					1x VGA, 2x HDMI					
Recording Throughput	768 Mbps							768 Mbps					Up to 2000 Mbps					
Video Management Solution	Surveon Enterprise Video Management Software (Client/Server Architecture, Multi Live View, On Screen PTZ Control , HTML Overlay, Playback, Smart Event Search, Real-time Video Analytics, Real-time Alarm Event Handling, Multiple LAN...)							Surveon Enterprise Video Management Software (Client/Server Architecture, Multi Live View, On Screen PTZ Control , HTML Overlay, Playback, Smart Event Search, Real-time Video Analytics, Real-time Alarm Event Handling, Multiple LAN...)					Milestone XProtect Corporate or Enterprise VMS			Surveon Enterprise Video Management Software		
Storage Expansion	iSCSI/NAS/JBOD							iSCSI/NAS/JBOD					iSCSI/NAS/JBOD					
Server Processor	Intel® Xeon E3 Quad Core 3.2GHz or Intel® Core i3 Dual Core 3.5GHz							Intel® Xeon E3 Quad Core 3.2GHz or Intel® Core i3 Dual Core 3.5GHz					Intel® Core i3 Dual Core or Intel® Xeon E3 Quad Core			Intel® Atom quad-core, 2.40 GHz		
No. HDD	12x SATA				16 x SATA			16 x SATA				12 x SATA		16 x SATA	5x SATA	8x SATA		
Video Analytics Channel	32							32					Based on VMS			N/A		
Remote View Soltuion	Remote Client (Full Managemnet), Web Client (Live View, PTZ Control, Playback, Real-time Event), iPhone Client (Live View, PTZ Control, Playback, Real-time Event), Android Client (Live View, PTZ Control, Playback, Real-time Event)							Remote Client (Full Managemnet), Web Client (Live View, PTZ Control, Playback, Real-time Event), iPhone Client (Live View, PTZ Control, Playback, Real-time Event), Android Client (Live View, PTZ Control, Playback, Real-time Event)					Milestone XProtect Corporate or Enterprise VMS			Remote Client		
CMS Soltuion	Centralized Domain Management (SCC), Video Matrix Wall, SurveOne (Web-based Easy System Management Tool)							Centralized Domain Management (SCC), Video Matrix Wall, SurveOne (Web-based Easy System Management Tool)					Milestone XProtect Corporate or Enterprise VMS			Centralized Domain Management (SCC), Video Matrix Wall, EonOne		
Dimension	88(H) x 447.4(W) x 524.41(D) mm				(H)130.00mm x (W)447.40mm x (L)524.20mm			(H)130.00mm x (W)447.40mm x (L)524.20mm				(H)88.00 x (W)447.40 x (L)524.41mm	(H)130.00 x (W)447.40 x (L)524.20mm		255mm(W) x 168mm(H) x 254 mm(D)	345mm(W) x 168mm(H) x 254mm(D)		
Weight	13.60kg/ 29.98lbs (without HDDs)				21.54kg/ 47.49lbs (without HDDs)			21.54kg/ 47.49lbs (without HDDs)				21.54kg/ 47.49lbs (without HDDs)		5.15kg/ 11.35lbs	6.51kg/ 14.35lbs			
Warranty	3 years							3 years					3 years					
Certification	UL, CB, FCC/CE Class A							UL, CB, FCC/CE Class A					UL, CB, FCC/CE Class A					

Cloud NVR Series					
<b>Model Name</b>	<b>EonStor GSe Pro 205/205T</b>	<b>EonStor GSe Pro 208/208T</b>	<b>EonStor GSe Pro 1004</b>	<b>EonStor GSe Pro 1008</b>	<b>EonStor GSe Pro 3008</b>
Description	Cloud-integrated Unified Storage with Surveon NVR License	Cloud-integrated Unified Storage with Surveon NVR License	Cloud-integrated Unified Storage with Surveon NVR License	Cloud-integrated Unified Storage with Surveon NVR License	Cloud-integrated Unified Storage with Surveon NVR License
Recording Camera Channel	4/9/16/24/32/48/64	4/9/16/24/32/48/64	4/9/16	4/9/16	16/32/48/64
Recording Days over CH*	Minimum 11 Days	Minimum 20 Days	Minimum 34 Days	Minimum 34 Days	Minimum 20 Days
RAID Level	RAID 0, 1 (0+1), 3, 5, 6, 10, 30, 50, 60				
Local Live View	N/A				
Recording Throughput	400 Mbps		400 Mbps		400 Mbps
Video Management Solution	Surveon Enterprise Video Management Software (Client/Server Architecture, Multi Live View, On Screen PTZ Control , HTML Overlay, Playback, Smart Event Search, Real-time Video Analytics, Real-time Alarm Event Handling, Multiple LAN...)				
Storage Expansion	JBOD		N/A		JBOD
Server Processor	Intel® Pentium-D dual-core 2.20 GHz/quad-core 1.60 GHz		Intel® Atom quad-core, 2.40 GHz		Intel® Pentium-D quad-core, 1.60 GHz
No. HDD	5x SATA	8x SATA	4x SATA	8x SATA	8x SATA
Video Analytics Channel	N/A				
Remote View Soltuion	Remote Client (Full Management), Web Client (Live View, PTZ Control, Playback, Real-time Event), iPhone Client (Live View, PTZ Control, Playback, Real-time Event), Android Client (Live View, PTZ Control, Playback, Real-time Event)				
CMS Soltuion	Centralized Domain Management (SCC), Video Matrix Wall, EonOne (Infotrend Web-based Management Tool)				
Dimension	255mm (W) x 168mm (H) x 254 mm (D)	345mm (W) x 168mm(H) x 254mm (D)	43.5(H) x 447(W) x 450(D) mm	88(H) x 447(W) x 450(D) mm	88(H) x 447(W) x 450(D) mm
Weight	5.15kg/ 11.35lbs	6.51kg/ 14.35lbs	6.51kg/ 14.35lbs	12.08kg/ 26.63lbs (without HDD)	12.08kg/ 26.63lbs (without HDD)
Warranty	3 years				
Certification	UL, BSMI, CB, EAC, CE, BSMI, FCC, KC				

\* Based on 4TB HDD, 2Mbps bit rate, 24 hr recording, RAID 5 best data protection (Non-RAID for 2 Bay)

## Video Management

Video Management Software		System Management Software	
<b>Software</b>	<b>VMS Enterprise</b>	<b>SurveOne</b>	
License	4/8/16/32 CH	Web-based System Management Tool	
Live Display	Real-time, Multiple View Configuration, HTML and Lmage Overlay	NVR/camera system status overview	
PTZ Control	Preset, Patrol, Event Trigger, Joystick	NVR device/network/storage real-time status monitoring	
Playback	Instant, Event, Recording by Date, Time	Camera real-time status monitoring	
Search	Date, Time, Camera, Event, Bookmark, Thumbnail, AVI Export	Easy NVR/camera configuration copy	
Video Analytics	Motion Detection, Missing Object, Foreign Object, Intrusion, Forbidden Area, Tampering, Object Counting, Virtual Fence	Easy NVR/camera configuration backup/restore	
Multiple Display	8	Easy camera firmware online upgrade	
Account Management	Local User	Easy multiple cameras batch setting	
Network Structure	Workgroup	NVR/camera real-time event log information	
Event Handling	Stadalone	Critical error/error/warning multi-level event classifications	
Multi-language Support	English, Spanish, Portuguese, Italian, French, German, Chinese, Japanese, Russian		
Packing	Installation CD		
Warranty	1 Year Free Upgrade		

 Swappable control board, fans and power supplies makes maintenance simple and lowers repair cost

## Camera Product Matrix





Form Factor	Box	Bullet			Dome					PT/PTZ			Fisheye		
Application Environment	Indoor	Indoor / Outdoor			Indoor		Outdoor			Indoor		Outdoor	Indoor	Outdoor	
Lens	Vari-focal	Fixed focal	Vari-focal	Zoom	Fixed focal	Vari-focal	Fixed focal	Vari-focal	Zoom	Fixed focal	Zoom	Zoom	Fixed focal		
Megapixel	2 MP	CAM2311SC CAM2331SC CAM2331SP	CAM3351R4 CAM3351R6 CAM3351E4-5	CAM3361LV CAM3371EM-5		CAM4311S2 CAM4311E2-5	CAM4321LV	CAM4351R2	CAM4361LV CAM4371EM-5	CAM4371HEM	CAM5321S4	CAM5330SZ			
	3 MP	CAM2441SC CAM2441HI	CAM3451R3 CAM3451R6	CAM3461LV	CAM3471HI	CAM1420S2 CAM4410S2 CAM4411S2 CAM4411S3 CAM4411S4 CAM4411S6	CAM4421LV		CAM4461LV	CAM4471HI			CAM6471EZ-5 CAM6471LZ-5		
	4 MP														
	5 MP	CAM2511SC CAM2511		CAM3571VP	CAM3571MP		CAM4521LV		CAM4561LV CAM4571VP	CAM4571MP			CAM7510 CAM7511	CAM4571RF	

## Support VMS List

Surveon camera models have been fully tested for compatibility with following 3rd-party VMS solutions, giving customers a broad range of selections for their projects.



## NVR Product Segment

Professional Economical	Enterprise Standard	Corporate Mission-Critical	Cloud-integrated Scalable
<p>Desktop Standalone RAID NVR</p>  <p>SMR2110/5110/8300 &amp; NVR3000 Series</p> <p>4 – 64 Channels 2/4/5/8 HDD</p> <p>For Entry to Mid-Range Projects</p>	<p>NVR Server + Subsystem Storage</p>  <p>NVR2100 Series</p> <p>16 – 64 Channels Up to 240 HDD</p> <p>For Enterprise Projects</p>	<p>NVR Storage Server (3-in-1)</p>  <p>NVR5400/7300/7800 Series</p> <p>16 – 150 Channels Up to 316 HDD</p> <p>For Mission-Critical Projects</p>	<p>NVR License + Cloud-integrated Unified Storage</p>  <p>EonStor GSe Pro 100/200/1000/3000 Series</p> <p>4 – 64 Channels Up to 428 HDD</p> <p>For A Variety of Projects</p>

## Support Camera List

The camera models from many 3rd party camera providers have been fully tested for compatibility with Surveon NVR systems, giving customers a broad range of solution selections for their projects.

