

CAM4360

Full HD Day&Night Outdoor Fixed Dome Network Camera



- Full HD & Real Time Network Camera
- Up to 1920 x 1080 Video Resolution
- H.264/MPEG4/MJPEG 2 Simultaneous Video Streams
- Surveon Video Intelligent Ready
- MicroSD/SDHC Local Storage for Alarm Capture
- 3X Optical Zoom and Surveon Auto Focus
- PoE (IEEE 802.3af) and Day/Night ICR
- Built-in IR Illuminators, Effective Up to 15 Meters
- IP66, Wide Temperature, and Vandal Proof for Outdoor Application



Network Camera

Product Specification

Camera	
Image sensor	1/2.7" 2 megapixel progressive scan CMOS
Lens	3 - 10 mm motor lens, F1.3
SNR	48dB
WDR	N/A
Day/Night ICR	Yes
IR LED	Yes (15M)
Min illumination	0.01 Lux @ F1.3 (B/W) 0.1 Lux @ F1.3 (Color)
Iris control	DC drive
Shutter time	1/7.5 ~ 1/100,000 s
Viewing angle	Diagonal: 129°~34° Horizontal: 100°~27° Vertical: 73°~20°
Camera angle adjustment	Pan 0° ~340° Tilt 30° ~90°
Pan/tilt/zoom functionalities	N/A
Video	
Video compression	H.264/MPEG-4/MJPEG
Resolution	Up to 1920 x 1080
Frame rate	30 fps at 1080P (1920 x 1080) 30 fps at SXGA (1280 x 1024) 30 fps at HD720 (1280 x 720) 30 fps at VGA (640 x 480) 30 fps at QVGA (320 x 240)
Video stream	Dual stream at H.264, MPEG-4, and MJPEG simultaneously
Bit rate	64K ~ 10Mbps, VBR, CBR, controller frame rate and quality
Video control	AGC (Auto Gain Control), AWB (Auto White Balance), AES (Auto Electronic Shutter), BLC (Back Light Compensation), image adjustment
Surveon Video Intelligent	Motion detection
Video jack	N/A
Audio	
Built-in MIC	N/A

Audio compression	16KHz, ADPCM/G.711
Audio input/output	3.5mm phone jack (optional)
I/O and Event Management	
Alarm in	2, terminal block (optional)
Alarm out	1, terminal block (optional)
Video buffer	5 second pre-alarm, 30 second post-alarm
Event action	Send snapshot or video clip by FTP or email, record to NAS, record to local storage, trigger DO

Network	
Supported Protocols	IPv4, ARP, TCP, UDP, ICMP, IGMP, DHCP, NTP, DDNS, SMTP, FTP, HTTP, CIFS, PPPoE, UPnP, RTP, RTSP, RTCP, 3GPP, ONVIF

Ethernet	10/100 Base-T / RJ45
----------	----------------------

System	
Local storage	microSD/SDHC x 1 (Class 4/Class 6 only)
RS-485	1 (2 pin on terminal block) (optional)
USB	N/A
SDK	Surveon SDK 2.0

Viewing System	
OS	Microsoft Windows XP/Vista/7
Browser	Microsoft IE 6.0 or above
Software	Surveon VMS 2.4.1


General	
Temperature	Operation: -25°C ~ 50°C (-13°F ~ 122°F) Storage: -30°C ~ 60°C (-22°F ~ 140°F)
Humidity	5 to 90%
Power	12VDC 1.5A ; PoE (IEEE 802.3af) with Class 3
Power consumption	Max. 9W (w/o Heater) Max. 25W (w/ Heater & DC Power)
Dimension	ø144mm x 116mm(H) ø5.67" x 4.57"(H)
Weight	Net: 1,260g (2.78lb.) Gross: 1,930g (4.27lb.)
Certification	Safety: LVD EMC: FCC, CE, GOST, KCC, IP66, IK10

* All specifications are subject to change without notice.
* All brand names and registered trademarks are the property of their respective owners.

CAM4360



Full HD Day&Night Outdoor Fixed Dome Network Camera

Part Names and Functions

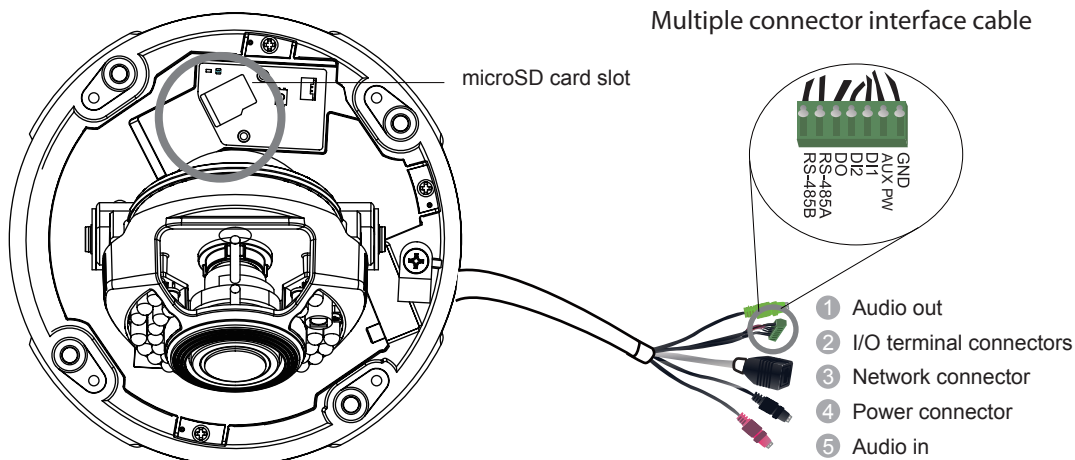

Appearance

Unit:mm(inches)

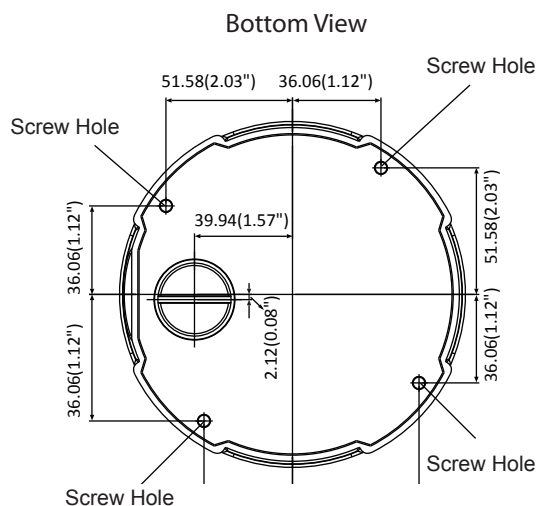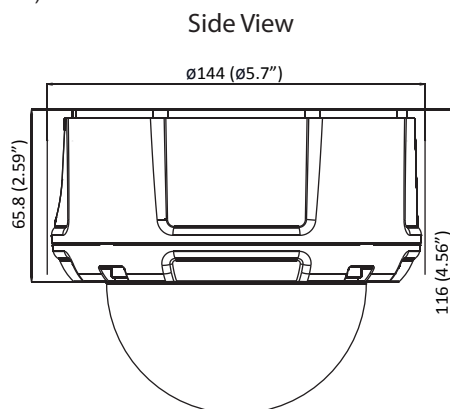

Package Content

Contents	Quantity
Quick Installation Guide	1
Product DVD	1
CAM4360	1
Screw Hole Indicator Sticker	1
Anchors and Mounting Screws	4
L Type Hexagon Spanner	1

Ordering Information

Part Number	Description
CAM4360-0056	Full HD day&night outdoor fixed dome network camera with motor lens

Optional Accessories

Part Number	Description
ZPWR18W-0030	Power Adapter
ZBracketL-0050	L type bracket