



- Providing 24 10/100Mbps switching ports and 2* gigabit combo (UTP/SFP) ports
- Fully support 15.4W per each port(IEEE 802.3af)
- Support 30W per port within 360W power budget (IEEE 802.3at)
- 17.3 inch case with holders for rack mount
- Smart plug & play
- Internal power supply
- 1-Year Warranty



Hardware Specifications

Standards	<ul style="list-style-type: none"> • IEEE 802.3 10BaseT • IEEE 802.3u 100BaseTX/100BaseFX • IEEE 802.3ab 1000Base-T, IEEE 802.3z 1000Base-SX/LX • IEEE 802.1x, back pressure for Half-duplex and for Full-duplex mode • IEEE 802.3af (class3 /class 2 / class 1) • IEEE 802.3at
Number of Ports	24 10/100BaseT with RJ-45 Connector with 2 combo RJ45/SFP
Data Transfer Rate	<ul style="list-style-type: none"> • Ethernet: 10Mbps/Half-Duplex, 20Mbps/Full-Duplex • Fast Ethernet: 100Mbps/Half-Duplex, 200Mbps/Full-Duplex • Gigabit : 2000Mbps/Full- duplex
Features	<ul style="list-style-type: none"> • MAC address table: 4K • Buffer memory: 2.75M bits • Broadcast storm control • Store & forward operation • Non-blocking & Non-head-of-line blocking full-wire speed forwarding • All ports support Auto-MDIX function
Filtering/Forwarding Rates	<ul style="list-style-type: none"> • 1000Mbps/1488,000pps • 100Mbps/148,800pps • 10Mbps/14,880pps
Transmission Media	<ul style="list-style-type: none"> • 10BaseT Cat. 3, 4, 5 UTP/STP, up to 100 m • 100BaseTX Cat. 5 UTP/STP, up to 100 m • 1000Base T, Cat. 5 UTP/STP, up to 100 m
Led Indicators	Per Port: <ul style="list-style-type: none"> • (TX): Link/Act, PoE Per Unit: <ul style="list-style-type: none"> • Power
Power Specification	Input <ul style="list-style-type: none"> • Power Input: 90~260V/AC, 50~60Hz UL Safety Power consumption <ul style="list-style-type: none"> • Power Consumption: 380 Watts Output <ul style="list-style-type: none"> • PoE Standard: IEEE 802.3af/at Power over Ethernet PSE • PoE Power Output: Per Port 56V DC, 15.4 Watts (802.3af) or Max 30 Watts (802.3at) <ul style="list-style-type: none"> - Power Pin Assignment: 1/2(+), 3/6(-) - Power Budget: Max. 360 Watts • PD classification identity • PoE over current protection • PoE circuit sorting protection
Dimensions	Product: 440 x 320 x 44 mm (L x W x H) Box: 515 x 440 x 110 mm (L x W x H)
Weight	Net Weight: 3.7Kg Gross Weight: 5.3Kg
Environmental Specification	<ul style="list-style-type: none"> • Power Cord • Product CD • User Manual • Rack-mount Holders
Certifications	FCC Class A, CE

ZPOE26

24 Port 10/100M + 2 Port GbE Combo
380W PoE Switch

Front Panel

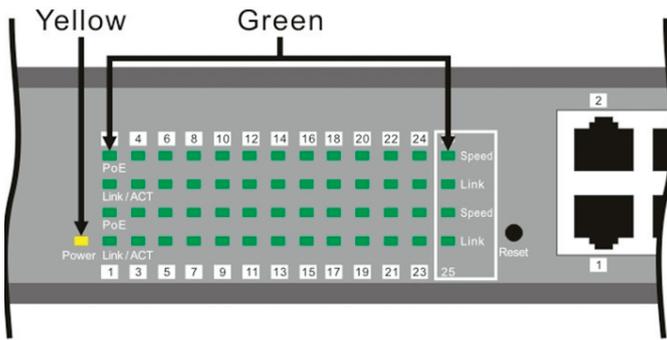


LED	Status	Description
Power	On	Power is on
	Off	Power is off
LINK/AC	On	Port is for connection.
	Off	No connection.
	Flashing	Data is transmitting or receiving
PoE	On	Port is linked to Power Device
	Off	No Power Device is connected

Real Panel



Application

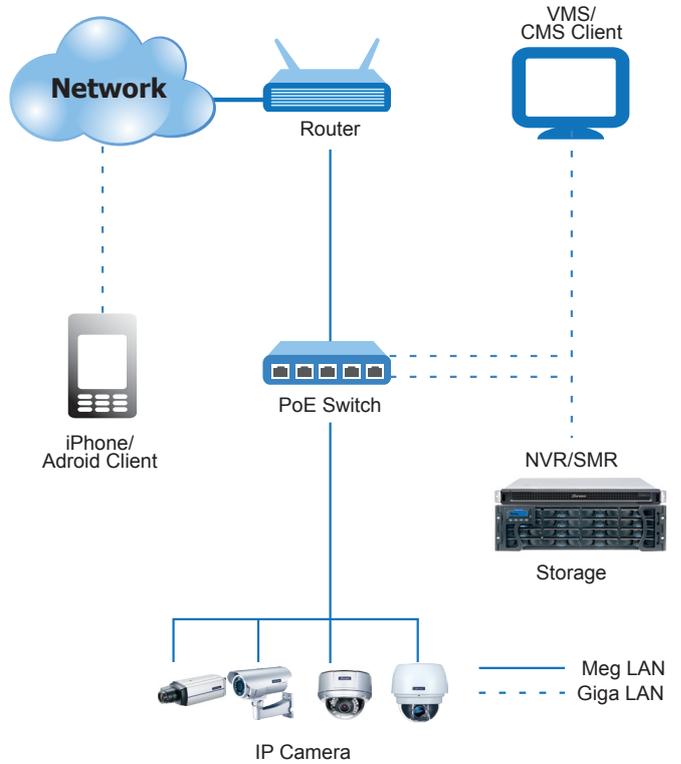

Accessories

Ordering Information

Part Number	Description
ZPOE26-0030	24 port 10/100Mbps + 2 port GbE combo(UTP/SFP) 380W PoE switch, US power cord
ZPOE26-8B30	24 port 10/100Mbps + 2 port GbE combo(UTP/SFP) 380W PoE switch, UK+EU power cord