




## POE-S48V2 PoE Series - 15.4Watt 10/100M PoE Injector


EAN Code: 4712757151565

The POE-S48V2, IEEE 802.3af compatible, Power over Ethernet Injector provides DC 48V over Ethernet cables. Unlike existing Power over Ethernet Injectors, the POE-S48V2 provides 10/100Mbps Fast Ethernet connection ability.


The POE-S48V2 Power over Ethernet (POE) adapter is designed to supply operational power to wireless LAN devices such as PoE access point bridges, routers, and surveillance cameras. With Power over Ethernet devices installed, the system administrator only has to use a single RJ-45 Ethernet cable to carry both power and data to each device. Some additional benefits of POE-S48V2 include cost saving, convenience in network planning, and higher reliability.

POE Injector POE-\$48V2







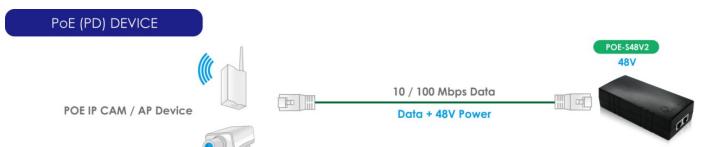

## **Features**

- Complying IEEE 802.3 10Base-T, IEEE 802.3u 100Base-TX,
- Max Power: 15.4Watt Class 3 POE
- Supports PoE Powered Device (PD ) classification identify
- Over Current Protection for currents over 15.4Watt
- Supports Diagnostic LED

## **Specifications**

Output Voltage 48V
Output Rating 0.4A

Input Voltage AC 100~240V, 50-60Hz

**Ethernet Cable Connector** RJ-45

**Power** PIN 1/2 & 3/6

Power PIN 4/5+ & 7/8

Port Data in:1 埠 RJ-45 connectors for 10/100BASE-TX

PWR+Data out: 1 埠 RJ-45 connectors for 10/100BASE-TX

Network Media 10BASE –T: UTP Cat. 3 or up,

100BASE-TX: UTP Cat. 5 or up

Network Data Transfer Rate 10/100Mbps (Half-duplex)

20/200Mbps (Full-duplex)

**PoE** Up to 15.4W PoE Over Current Protection

**Diagnostic LEDs** Power unit x1 : AC power in(Red), General powered (Green)

**Operating Temperature**  $0-55^{\circ}C$ 





Storage Temperature -20 °75° C

Operating Humidity 10% to 90% non-condensing Storage Humidity 5% to 90% non-condensing

**Dimension (W x H x D)** 136 x 65.5 x 35mm

Case of material ABS 94V-0

Weight 130g

**EMI** FCC ,CE, RoHs compatible

## **Package Content**

POE-S48V2 Main Unit x 1
Power Cord x 1
Warranty Card x 1